

Inspect- I2



KARLVILLE

The i2 model operates in forward & backward directions with memory functions to return roll to defect position. The machine operates at 300 meters / min and is designed for shrink sleeve inspection process with in-line continuous perforations. A strobe synchronized by photo sensor is a standard accessory. Flexible packaging and adhesive label materials may be inspected with lay-on roller option.


Machine Specifications

Description	Spec
Speed	300 m/min
Widths	300 / 400 / 500 / 600 mm
Unwind Diameter	600 mm
Rewind Diameter	300/400/500/600 mm
Core Diameter	3"(76mm)

Machine Works for 100% Inspection with the Addition of Second Rewind Edge Guide Option

Inspection

In order to ship direct from seamer, all print defects must be doctored prior to seaming

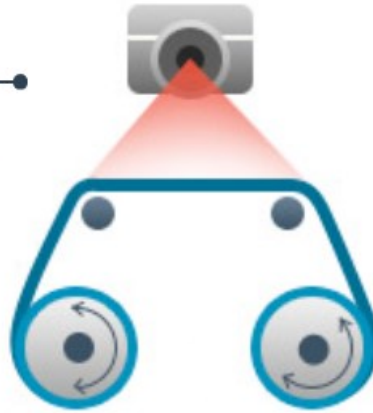

Layout

