


Seam- K5 JUMBO

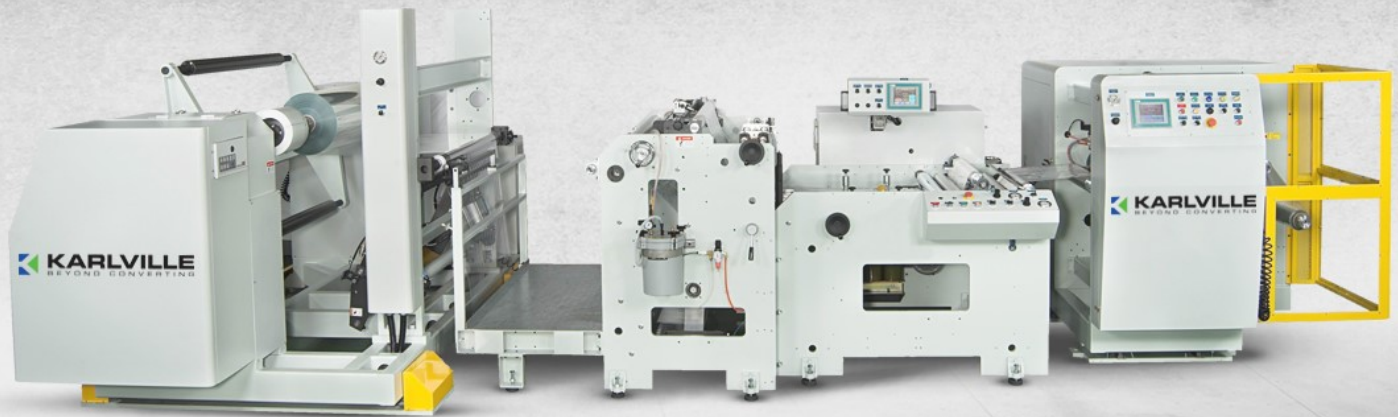

KARLVILLE

This Non-Stop machine features Automatic Supported Turret Unwind & Cantilever Turret Rewind. Both Servo & AC Motor technologies available for 300M/MIN and 400M/MIN speeds. The machine is available in 350mm & 500mm lay-flat models. Non-Stop production translates to higher production, lower waste and savings in inspection cost.

Machine Specifications

| Description | Spec |
|------------------------|-------------------------|
| Speed | 400 m/min |
| Width | 350 / 500 mm |
| Material Width | 850 / 1050 mm |
| Rewind Diameter | 800 / 1000 mm |
| Unwind Diameter | 600 mm |
| Minimum Lay flat Width | 55 mm with 18 mm Option |
| Core diameter | 3" (76mm) |
| Lay Flat Tolerance | 0.25 mm |

Advantages

KARLVILLE CUSTOMER

Our customers are companies with fast growing operations in the market.

FILMS ALWAYS STRAIGHT THROUGH MACHINE

Never forced side to side for oscillation. Even with turrets; complete turret moves back and forth on heavy duty linear bearings.

PRECISION SOLVENT APPLICATION

Direct Injection Needle Type Solvent Application with Proportional Solvent Controlled Integrated to PLC.

FLEXIBILITY

- Fully Adjustable Forming System
- Multiple Configurations to meet specific Converter Demands
- Tightest lay flat tolerance in the industry
- Precise Tension Control via Unwind & Rewind Load
- Cell System with Closed Loop Via PLC
- Robust design & easy operator friendly Control System

SERVICES STAFF

Our team truly understands business; cross trained in Sleeve Application. Karlville Technicians are considered among the best in the Shrink Sleeve Business.

Layout

