


Slit- JHS

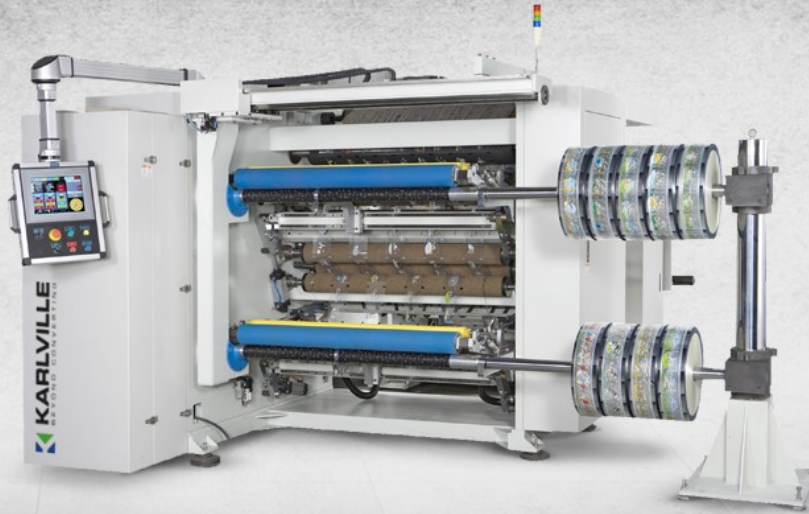

KARLVILLE

This new high performance robust overhead slitter re-winder combines new technology, features and design in an ergonomic concept. This model has smart solutions, which makes it reliable, advanced and versatile with an unmatched throughput and shaftless unwind with electric lift system.

The materials that can be processed are:

- Plastic films made from PE, PP, PET, PVC,
- Papers and laminates. (depending on material type and thickness)
- Rigid films: 10~200 micron / Soft films:12~300 micron

Machine Specifications

Description	Spec
Speed	800 m/min
Web Width	1300 / 1600 / 1800 / 2000 mm max
Unwind Roll Diameter	1000 mm
Unwind Roll Weight	1.200kg max
Unwind Roll Cores	3" I.D. - 6" I.D. (option)
Finished Roll Diameter	600 mm max—800 mm (option)
Finished Roll Cores	3" I.D. - 6" I.D. (option)
Slit Width	50 mm and up (Lower Upon Request)
Knives	Shear, Razor & Pneumatic (Auto Knife Position Option)
Winding Tension	0.5 pli to 2.5 pli (11 - 45 kg) standard

Vacuum Hug Drum

Benefits

- Absolute Tension Isolation between Unwind and Rewind
- Slip Free Web Transport
- Avoids Wrinkles

Main Drive

Higher Efficiency vs. Nip Design

Allows maximum Machine Speed while maintaining precise tension



Layout

